



Float Switch for Industrial Applications SV 11

Float switch made of stainless steel with cable outlet



- Easy construction
- Robust design
- Maintenance-free
- Reed switch as a switching element
- Optional customized versions


D-EN-SV11-20190424



Float Switch for Industrial Applications SV 11

Float switch made of stainless steel with cable outlet

Dimensions

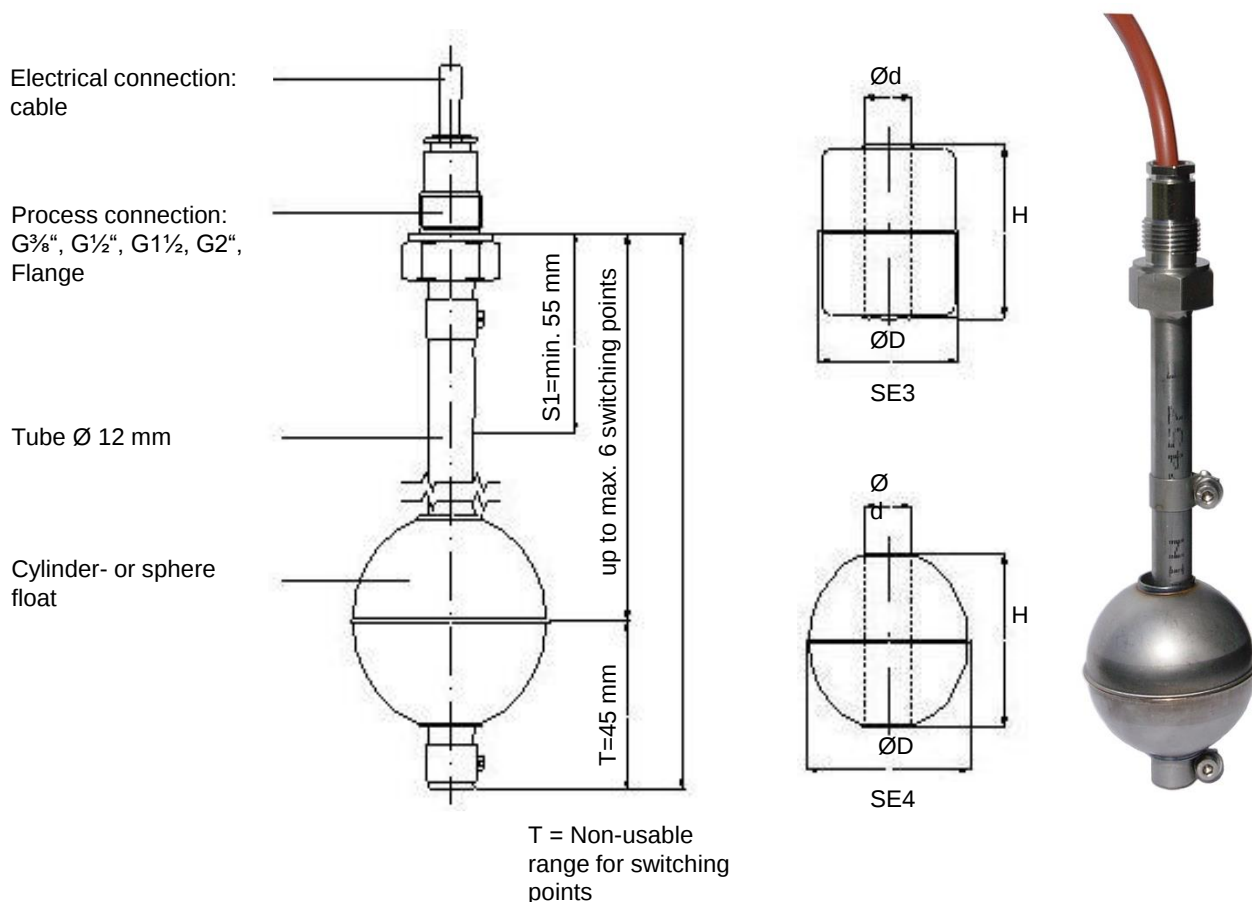

Float	Dimensions (mm)			Operating pressure max. (MPa)	Operating temperature max. (°C)	Density (kg/m ³)	Material
	Ø D	Ø d	H				
SE3 cylinder	44	15	52	1,6	150	≥ 750	316 Ti
SE4 sphere	52	15	52	4,0	150	≥ 750	316 Ti

D-EN-SV11-20190424



Float Switch for Industrial Applications SV 11

Float switch made of stainless steel with cable outlet

Application

The float switch SV 11 is used for reliable and accurate level monitoring and level indication of liquids. The stainless steel used is suitable for a multitude of media, such as, for example, oil, water, diesel and refrigerants. Due to its robust and maintenance-free design, SV 11 can i.a. be used in the following industries:

- Plant construction
- Off-shore
- Mechanical engineering
- Energy plants
- Chemistry
- Power plants
- Biochemistry
- Shipbuilding
- Petrochemicals
- Food
- Natural gas industry
- Pharmacy etc.

Measuring principle

A permanent magnet built into the float triggers, with its magnetic field, the potential-free reed contacts built into the guide tube. The triggering of the reed contacts by the permanent magnet is contact-free and thus free from wear. Depending on customer wishes, the switching functions of normally open, normally closed or change-over can be realized for the defined liquid level.

Technical data

Switching power	Normally closed (NCC) / normally open contact (NOC): 230 V AC; 100 VA; 1 A AC 230 V DC; 50 W; 0,5 A DC
	Change over contact (SPDT): 230 V AC; 40 VA; 1 A AC 230 V DC; 20 W; 0,5 A DC
Switching function	NCN, NOC, SPDT on rising level
Mounting position	Vertical, $\pm 30^\circ$
Medium density	$\geq 750 \text{ kg/m}^3$
Temperature	-30°C up to +150°C
Protection	IP 66
Operating pressure max.	4.0 MPa
Length of the tube L	Standard: up to 6000 mm, >6000 mm on request
Process connection	Standard: G $\frac{1}{2}$ ", G2", Flange DN50 PN16; other versions on request

Important instructions!

Technical changes and errors reserved.
Pictures can be similar.

The operating instructions belonging to this device must be observed! Download at www.schmidt-messtechnik.com.



Float Switch for Industrial Applications SV 11

Float switch made of stainless steel with cable outlet

Ordering information

SV-11

Process connections (install vertically, $\pm 30^\circ$)

- A Process connection G $\frac{3}{8}$ ", 316 Ti
- B Process connection G $\frac{1}{2}$ ", 316 Ti
- C Process connection G $1\frac{1}{2}$ ", 316 Ti
- D Process connection G 2", 316 Ti
- E Flange DIN 2527, Form B, DN50 PN16, 316 Ti

Tube length L, Tube material 316 Ti

Tube length from sealing surface process connection
Length of tube $L \leq 6000$ mm; $L > 6000$ mm on request
Indication in mm

Float types

- Z SE3 (cylinder $\varnothing 44$, 316 Ti)
- K SE4 (sphere $\varnothing 52$ 316 Ti)
- X other versions on request

Temperature range

- N -30° up to $+80^\circ\text{C}$
- H -30° up to $+150^\circ\text{C}$

Number of switching points (see Dimensions)

Length of cable Indication in m

Switching function

- on rising level
- O normally closed (NCC)
- S normally open (NOC)
- U Change over

Position of switching point from sealing surface process connection Indication in mm

SV-11								
-------	--	--	--	--	--	--	--	--

S1		
S2		

⋮