



Density Transducer Type DIMF 1.3

Oscillating element density meter



- Internal thread G1/4" ISO 228, flange DN 10 PN 40, sterile fittings according to DIN 405 PN 16
- Measuring accuracy $\pm 0.1 \text{ kg/m}^3$
- Reproducibility $\pm 0.05 \text{ kg/m}^3$
- Media temperature depending on the version -40°C to $+100^\circ\text{C}$
- Approved for custody transfer, depending on the version

D-EN-DIMF-13_20200629



Density Transducer Type DIMF 1.3

Oscillating element density meter

Measuring principle

The basic sensor of the density transducer is an oscillating element. The liquid to be measured passes continuously through this element. Excited electromagnetically by an excitation coil, it will oscillate at its natural frequency. Changes in the density of the liquid lead to changes in the natural frequency. This change in frequency, sensed by a pickup coil, represents the measurement effect. An additional built-in resistance thermometer measures the process temperature, which can also be used to compensate the temperature influence in the transducer. Each meter is calibrated with reference liquids of different densities. In the configuration data sheet you can see the parameter for the calculation of the density out of the frequency and the correction coefficient of the influence of temperature.

Range of applications

The density transducer type DIMF allows the continuous measurement of the density of liquids and liquid mixtures. The proven oscillating element principle ensures great accuracy in combination with outstanding long-term stability. The robust design assures reliable operation, even under rough process conditions.

System configuration

Sensor element: hollow tuning fork

Preamplifier PVS and PKS

Output:
operating density dependent frequency, non linearized, modulated on power supply, duty cycle 1:1, ca. 1400 Hz (depend on sensor type), linearization and temperature compensation in connected flow computer.

Power supply:
24 VDC (min. 15 VDC / max. 30 VDC)
intrinsically safe

Density connection:

2-wire-technology, connection over screw terminal and cable gland M20x1,5

Temperature connection:

4-wire-technology, connection over screw terminal and cable gland M20x1,5 (Pt 100 in DIMF integrated)

Cable specification

2- or 4-wired, twisted paired and shielded

Transmitter TVS, TWS and TWH

HART®- protocol:

Operating over PC or Laptop with the software PACTware (HART®-modem necessary) or a handheld terminal (for example HH275 or HH375). FDT1.2 driver available.

Output:

4-20 mA, linearized and temperature compensated, configurable for every calculated or measured value (for example operating density, reference density, concentration, °Brix, °Plato or other derived units).

Power supply:

24 V DC (min. 14 V DC / max. 30 V DC)
intrinsically safe

Connection:

2-wire-technology, connection over screw terminal and cable gland M20x1,5 or ½" NPT thread for pipe installation (Conduit-System)

Cable specification

2- or 4-wired, twisted paired and shielded

Displayed values:

Density, concentration, operating temperature and others



Density Transducer Type DIMF 1.3

Oscillating element density meter

Types


- **V** Compact version - transmitter mounted on the sensor
- **K** Compact version - only for DIMF 1.3 with preamplifier „P“ and thread connection 1/4“ acc. ISO228
- **W** Version with separate transmitter for wall mounting (cable 1,5m)
- **S** Standard temperature: - 40 ... +150°C
- **H** High temperature: - 40 ... +210 °C, (only for transmitter „TWx“)

Input


Measured value	Operating density, reference density, concentration
Measuring range	Operating density, density at reference temperature (reference density)
Density range	0 up to 5000 kg/m ³
Calibration range	400 up to 2000 kg/m ³
Accuracy	Better than ±0,01%
Repeatability	better than ±0,005%

Design, dimensions



PV, PK preamplifier



TV transmitter

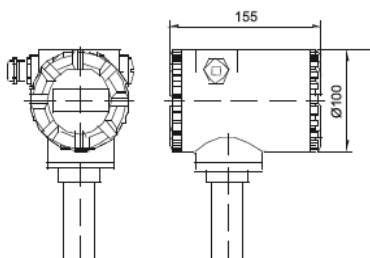

TW wall mounted with cable length 1,5m

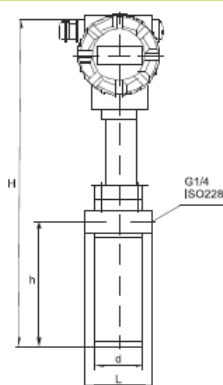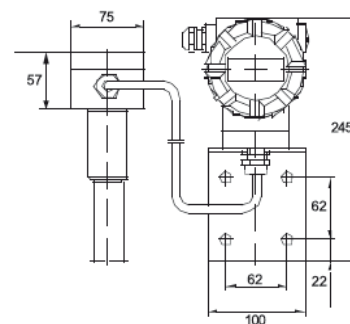

Dimensions (mm)

Length acc. type (L)

Female threads Flanges

82 200

H

h

d

**DIMF
1.3 PV**

**DIMF
1.3 PK**

**DIMF
1.3 TV**

**DIMF
1.3 TW**

374

241

412

408

155

155

155

155

60,3

60,3

60,3

60,3



Density Transducer Type DIMF 1.3

Oscillating element density meter

Material	
Materials of wetted parts	Special alloy from NiFeCr and 1.4571
Material of sensor housing	Stainless steel 1.4571 (SS316)
Specialtes	Version without gaskets
Attention: Please refer to "Pressure limit and process connection" for possible combinations of type and material-	

Degree of protection			
	Ambient temperature	Housing	Ex-protection
DIMF 1.3 TVS EExi	-40 to +58°C	IP67	II 1/2 G EEx ia IIC T4 Sensor element suitable for Zone 0. Observe special conditions.
DIMF 1.3 TVS EExd	-40 to +58°C	IP67	II 2 G EEx d [ib] IIC T4 Observe special conditions.
DIMF 1.3 PV EExi	-50 to +70 / +85°C	IP65	II 2 G EEx ib IIC T6/T5
DIMF 1.3 TVS EExd	-40 to +60°C	IP65	II 2 G EEx d [ib] IIC T4
Protection for housing IP according IEC 59 / EN 6059, Ex-approval directive 94/9/EC Attention: The LC-display of the transmitter TV work from -10°C up to +70°C. Tantalum type with TVS: EExi IIG EEx ia IIC T4.			

Pressure limit and process connection	
Pressure limit	Max. 100 bar depending on the process connection
Process connection	Core thread G1/4" acc. ISO 8
	Flange connection acc. DIN545: DN10 PN40
	Flange connection acc. DIN547: DN10 PN100
	Flange connection acc. ANSIB16.5: 1/2" ANSI150 RF 1/2" ANSI300 RF 1/2" ANSI600 RF
Attention: DIMF 1.3 is available only with stainless steel 1.4571, stainless steel 1.4306 or Hastelloy C4.	

Temperature limit	
Operating temperature	-40 up to +100°C

D-EN-DIMF-13_20200629



Density Transducer Type DIMF 1.3

Oscillating element density meter

Flow range and pressure loss	
Flow in l/min recommended limits	0,03 to 1 0 to 10
Pressure loss in bar (H ₂ O, 20°C)	1 l/min : 0,015

Certificates and approvals

EC-certificate of conformity CE-DIMF

Directive 94/9/EG (Ex-protection)

EN 13463-1: Non-electrical equipment for use in potentially explosive atmospheres

EN 1127-1: Ex-protection, basic concepts and methodology

EN 60079-0: Explosive atmospheres. Equipment. General requirements.

EN 60079-11: Intrinsically safety „i“

EN 60079-1: Flameproof enclosures „d“

- DIMF with transmitter Type TVS EEx ia ZELM 99 ATEX 0008 X
- DIMF with transmitter Type TVS EEx d BVS 04 ATEX E 020 X
- DIMF with preamplifier PV24 EEx ib DMT 00 ATEX E 092 X
- DIMF1.3 with preamplifier PV24 EEx d DMT 00 ATEX E 092 X

Directive 2004/108/EC (EMC Electromagnetic Compatibility)

• EN 61000-6-2: Generic standards. Immunity for industrial environments

• EN 61000-6-3: Generic standards. Emission standard for residential, commercial and light-industrial environments

Directive 97/23/EC (PED – Pressure Equipment Directive)

• Classification acc. §3 Abs. 3 “Sound engineering practice”

• Pamphlets

Type-approval certificate under German law

Measuring Equipment Directive – MID

Other approvals and certificates

GOST- approval (GOST R Ex-approval, GOST R Pattern approval)

Gorteknadzor, NEPSI

Important instructions!

Technical changes and errors reserved.

Pictures can be similar.

The operating instructions belonging to this device must be observed! Download at www.schmidt-messtechnik.com.