



Flow Sensor Amplifier SKM 522

Amplifier for calorimetric flow sensors



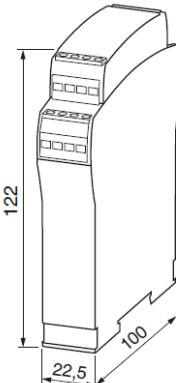
- Clamp rail mounting
- Extremely comfortable operation
- Integrated system error message
- Further voltage range
- LED adjustment indicator
- Particularly narrow design (23 mm)
- Cable break monitoring
- Turn-off delay



Flow Sensor Amplifier SKM 522

Amplifier for calorimetric flow sensors

Technical data

Design	SKM 522 WR	SKM 522 GR
Dimensions		
ID-No.	P11336	P11337
Output	 Relay	 Relay
Supply voltage [V]	85 AC...260 AC	24 DC $\pm 20\%$
Turn-off delay [s]	0...25 programmable	
Output	2 x relay / change over	
Switching voltage [V]	250 AC / 60 DC	
Switching current [A]	4 AC / 4 DC	
Switching power max.	1000 VA / 60 W	
Ambient temperature [°C]	-20...+60	
Additional functions	Cable break monitoring, turn-off delay, supply voltage monitoring	



Flow Sensor Amplifier SKM 522

Amplifier for calorimetric flow sensors

Technical Data

Design	SKM 522 WR	SKM 522 GR
Protection [EN 60529] terminal housing	IP 20 IP 40	
Connection	Terminal screws	